

LED DOWNLIGHT

Model No. DLC6C-16W203swej

The Euri Lighting LED 6" commercial downlight features two switches on the unit which allows for adjustment of the input power 7W/10W/16W, lumen output 700lm/1000lm/1500lm, and color temperature 27K/30K/35K/40K/50K. This downlight is made for easy installation in new construction, remodel, and retrofit projects. Its 90+ CRI and frosted lens allow for true color rendering to bring out vivid colors throughout, and glare-free lighting making it ideal for commercial use in retail spaces, hospitals, offices, and airports. Features include: 0-10V dimming, 5CCT selectable, 3 Wattage Selectable, wet rated, JA8, IC Rated, and Energy Star.

*Available accessories include a 6" goof ring and mounting plate.



N/A

REPLACEMENT

3 Wattage Selectable

5CCT Selectable

90+ CRI

True COLOR

0-10V Dimmable

Wet Rated

IC RATED
Abutted and Covered

Electrical Specifications


Input Power	Equivalency	Input Voltage	Lumen Output	Luminous Efficacy	CCT	Estimated Yearly Cost
7 W	N/A	AC120-277V	700 lm	100 lm/W	27K/30K/35K/40K/50K	\$ 0.84
10 W	N/A	AC120-277V	1000 lm	100 lm/W	27K/30K/35K/40K/50K	\$ 1.20
16 W	N/A	AC120-277V	1500 lm	100 lm/W	27K/30K/35K/40K/50K	\$ 1.92

Beam Angle	Center Beam	CRI	Power Factor	Input Current	Base	Lamp Lifespan
90°	N/A	90+	0.9	0.15 A	Wire	50,000 Hrs.

Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Wet Rated	-4°F - 104°F	1 pc	4 pcs	8.25"(ø) x 5.13"(H)	811174037361

Product Dimensions

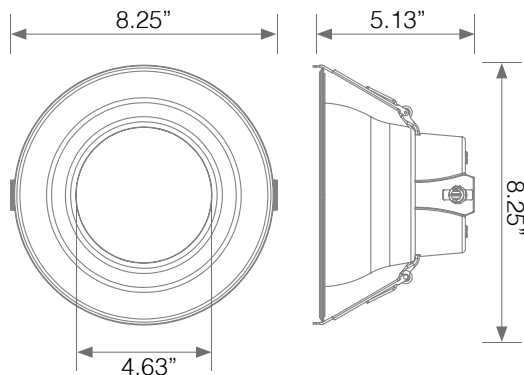

Cut-Out Size

